



URSUS

230V hydraulic actuator

for swing gates
with leaves
up to 6 m in length

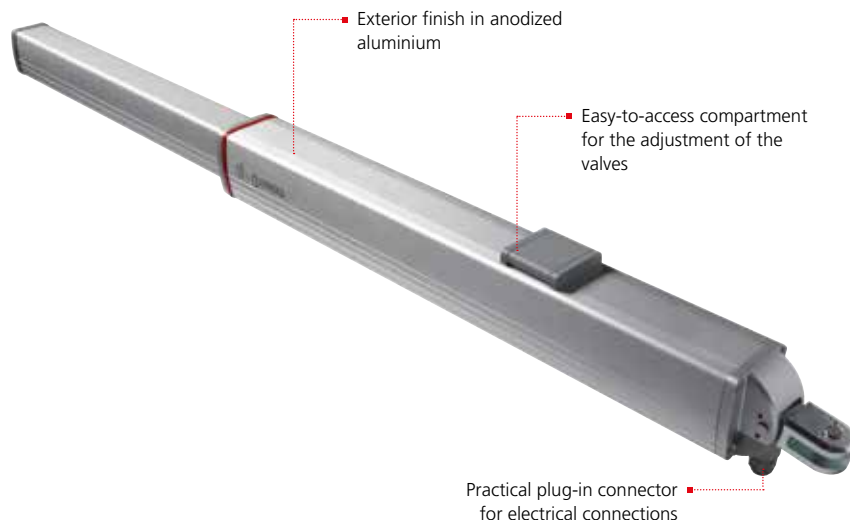

- Ideal for intensive use
- Single version for right and left leaf
- Opening and closing lock
- Closure mechanic shock absorber
- Push and pull adjustment through adjustable valves

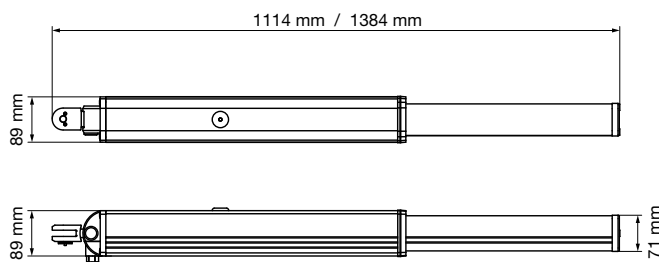

TECHNICAL FEATURES

Description	230V irreversible leaves up to 4 m	230V irreversible leaves up to 6 m
MODEL	URSUS-A33LB	URSUS-A43LB
CODE	22D015	22D016
Maximum leaf length (m)	4	6
Maximum leaf weight (Kg)	700	700
Power supply (Vac - Hz)	230 - 50	230 - 50
Full load current (A)	1	1
Maximum electric power (W)	230	230
Opening time of the leaf 0 ÷ 90° (s)	22	33
Maximum travel (mm)	265	400
Operating speed (m/s)	0,01	0,01
Maximum thrust (N)	7000	7000
Working temperature (°C)	-30 ÷ +90	-30 ÷ +90
Protection degree (IP)	65	65
Duty cycle (%)	100	100
Motor weight (Kg)	9,5	11

CONTROL UNITS TO BE USED



CITY1-EVO	FLEXY2
Digital control unit for 230V motors	Analogue control unit for 230V motors

ACCESSORIES



162913	162912	ACC009
12V horizontal electric lock	12V vertical electric lock	Warning sign

ELECTRONIC KITS



Kit MODEL ▼	CONTROL UNIT	PHOX2	MR2	SENSIVA-XS	LUMOS-M	Kit CODE ▼
Kit UNIVERSAL 1E	CITY1-EVO	■ ■	■	■	■	28A087
Kit UNIVERSAL 2	FLEXY2	■ ■		■	■	28A061